


# EVO20-P

| Preliminary data sheet |

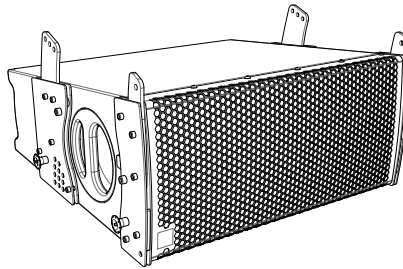

## TECHNICAL DATA - EVO20-P

<b>LF Transducers</b>	2 × 10" High performance woofers
<b>HF Transducers</b>	1 x compression driver, 1.4" horn throat diameter, 75 mm (3 in) voice coil
<b>Power Handling (RMS)</b>	LF: 400 W   HF: 70 W
<b>Nominal Impedance</b>	LF: 8 Ohm   HF: 8 Ohm
<b>SPL (Continuous/Peak)</b>	127/133 dB SPL
<b>Frequency Range (-10 dB)</b>	66 - 20000 Hz
<b>Frequency Range (-3 dB)</b>	88 - 17000 Hz
<b>Aiming/Prediction Software</b>	EASE FOCUS
<b>Coverage</b>	90° Horizontal
<b>Connectors +/-1 +/-2</b>	2 x Neutrik speakON® NL-4 in parallel Input Link
<b>Cabinet Construction</b>	15 mm Birch Plywood
<b>Grille</b>	1.5 mm perforated weatherised steel with protective foam
<b>Finish</b>	Durable IDEA proprietary Aquaforce High Resistance paint coating process
<b>Rigging Hardware</b>	High-resistance, coated steel integrated 4-point rigging hardware 10 angulation points (0°-10° internal splay angles in 1° steps)
<b>Dimensions (WxHxD)</b>	626 x 278 x 570 mm (24.6 x 10.9 x 22.4 in)
<b>Weight</b>	30.2 kg (66.6 lb)
<b>Handles</b>	2 integrated handles
<b>Accessories</b>	Rigging frame (RF-EVO20) Transport cart (CRT EVO20)

## TECHNICAL DRAWINGS - EVO20-P

