

# M1-S

Live Performance Dynamic Microphone with Lockable Switch

**RØDE**<sup>®</sup>  
MICROPHONES





## Features

- Live dynamic vocal microphone
- High output neodymium capsule
- Locking on/off switch
- XLR security lock
- Gold plated XLR connectors
- Balanced, low impedance output
- Internal pop-filter to reduce plosives
- Feedback rejecting pick up pattern
- Heavy duty metal body
- Low handling noise
- Designed and manufactured in Australia
- Ten year warranty\*

## Specifications

|                     |  |
|---------------------|--|
| Acoustic Principle  | Dynamic  |
| Frequency Range     | 75Hz ~ 18,000Hz  |
| Nominal Impedance   | 320Ω   |
| Net Weight          | 360g (0.79lb)  |
| Directional Pattern | Cardioid   |
| Sensitivity         | -56dB ±2dB re 1V/Pa<br>(1.6mV @ 94 dB SPL) @ 1kHz                                |
| Dimensions          | Length - 171mm (6.73")<br>Diameter - 51.5mm (2.03")                              |
| Shipping Weight     | 700g (1.54lb)  |
| Output Connection   | 3 pin XLR, balanced output<br>between Pin 2 (+), Pin 3 (-) and<br>Pin 1 (ground) |

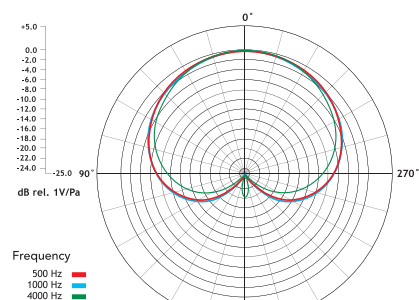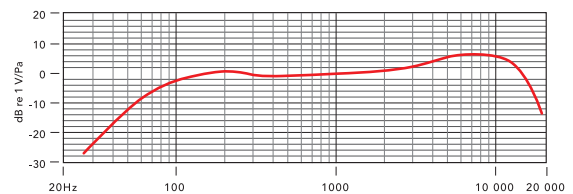

## Included Accessories



- RM1 stand mount
- ZP1 zip pouch
- M3 screw
- Flat screwdriver

[www.rodemic.com](http://www.rodemic.com)

\*After online registration - full terms and conditions on [rodemic.com](http://rodemic.com)

Australia  
107 Carnarvon st, Silverwater NSW 2128 Australia  
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA  
PO Box 4189 Santa Barbara CA 93140 USA  
Ph: +1 805 566 7777 Fx: +1 805 566 0071